




Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

Designer's Data Sheet

Part Number/Ordering Information ^{1/}

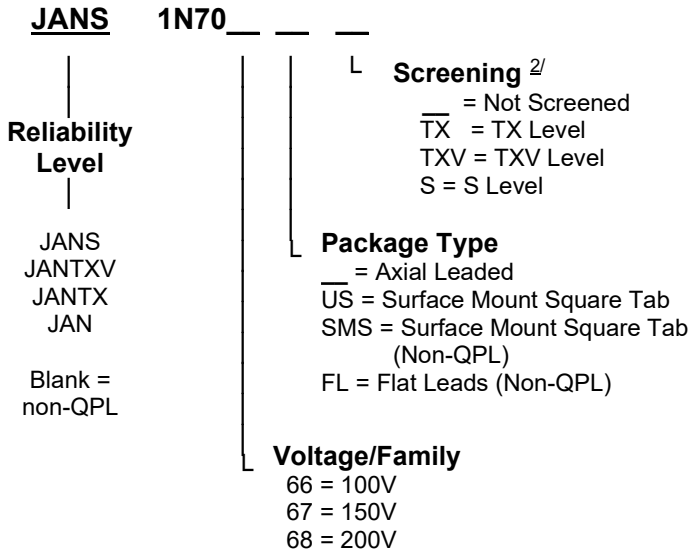

1N7066 thru 1N7068 Series

Qualified Levels: JANS, JANTXV, JANTX, JAN
 i.a.w MIL-PRF-19500/768

10 AMP
VOID-LESS HERMETICALLY SEALED
HYPERFAST RECOVERY RECTIFIER
100 – 200 VOLTS, 30 ns

FEATURES:

- Hyperfast reverse recovery: 30ns maximum ^{4/}
- High surge current: 250 A maximum
- Hermetically sealed
- Low forward voltage drop .95 V @10 A
- Void free ceramic frit glass construction
- High temperature category I eutectic metallurgical bond
- Available in axial leaded, square tab, and flat leads versions
- TX, TXV, and S-level screening available ^{2/}
- Available as a QPL product per MIL-PRF-19500/768
- Axial lead higher current replacements for:
 1N5807, 1N5809, 1N5811
- Possible SMS replacements for stud mount:
 1N5812, 1N5814, 1N5816

MAXIMUM RATINGS^{3/}

RATING		SYMBOL	VALUE	UNIT
Peak Repetitive Reverse Voltage and DC Blocking Voltage	1N7066	V_{RRM}	100	V
	1N7067	V_{RWM}	150	
	1N7068	V_R	200	
Average Rectified Forward Current (Axial $T_L \leq 55^\circ\text{C}$; US / SMS $T_{EC} \leq 100^\circ\text{C}$) ^{5/}		I_o	10	A
Peak Surge Current (8.3 ms pulse, half sine wave, superimposed on I_o , V_{RWM} = rated, allow junction to reach equilibrium between pulses, $T_A = 25^\circ\text{C}$)		I_{FSM}	250	A
Operating & Storage Temperature		T_J and T_{STG}	-65 to +175	$^\circ\text{C}$
Thermal Resistance	Junction to Lead for Axial & FL, L = .125"	$R_{\theta JL}$	8	$^\circ\text{C/W}$
	Junction to End Tab for Surface Mount	$R_{\theta JE}$	4.5	

NOTES:

- For ordering information, price, operating curves, and availability- contact factory.
- Screening based on MIL-PRF-19500. Screening flows available on request.
- Unless otherwise specified, all electrical characteristics @ 25°C.
- $I_F = 1A$, $I_R = 1A$, $I_{RR} = 0.1A$, $T_A = 25^\circ\text{C}$
- Operating at higher I_o currents may be achieved based on specific application and device mounting if T_J is maintained below 175°C.

Axial Leaded

Surface Mount Square Tab (US)

Flat Leads (FL)



NOTE: All specifications are subject to change without notification. SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RC0119N

DOC



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

1N7066 thru 1N7068 Series

ELECTRICAL CHARACTERISTICS^{3/}

CHARACTERISTICS	SYMBOL	MIN	MAX	UNIT	
Instantaneous Forward Voltage Drop 300 μ s pulse	$I_F = 6.0$ Adc	V_{F1}	-	0.900	Vdc
	$I_F = 10$ Adc	V_{F2}	-	0.950	
	$I_F = 20$ Adc	V_{F3}	-	1.050	
	$I_F = 6.0$ Adc, $T_A = +125^\circ\text{C}$	V_{F4}	-	0.850	
	$I_F = 6.0$ Adc, $T_A = +150^\circ\text{C}$	V_{F5}	-	0.780	
	$I_F = 6.0$ Adc, $T_A = -55^\circ\text{C}$	V_{F6}	-	1.050	
Reverse Leakage Current At rated V_R , 300 μ s pulse	$T_A = +25^\circ\text{C}$	I_{R1}	-	10.0	μA
	$T_A = +125^\circ\text{C}$	I_{R2}	-	1.0	mA
	$T_A = +150^\circ\text{C}$	I_{R3}	-	4.0	mA
Breakdown Voltage $I_R = 100 \mu\text{A}$	1N7066	BV_R	110	-	V
	1N7067		160	-	
	1N7068		210	-	
Junction Capacitance $V_R = 10$ Vdc, $f = 1$ MHz		C_J	-	80	pF
Reverse Recovery Time $I_F = 1$ A, $I_R = 1$ A, $I_{RR} = 0.1$ A		t_{RR}	-	30	ns

Fig.1 Typical Leakage Current
 I_R vs V_R vs T_c


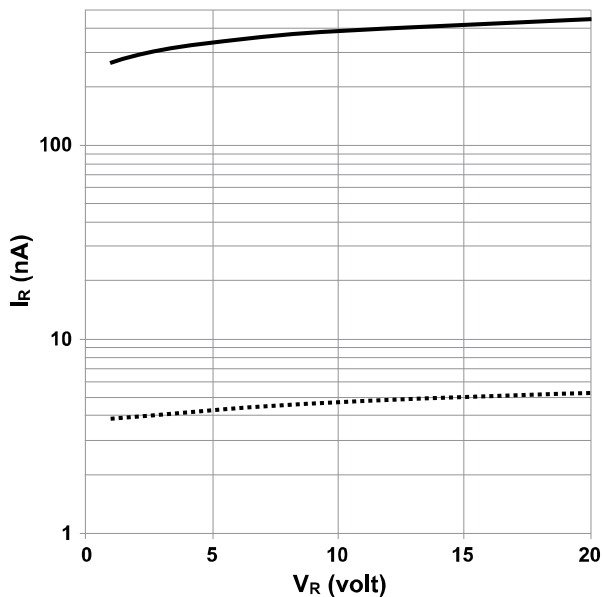


Fig.2 Typical Forward Voltage
 I_F vs V_F vs T_c

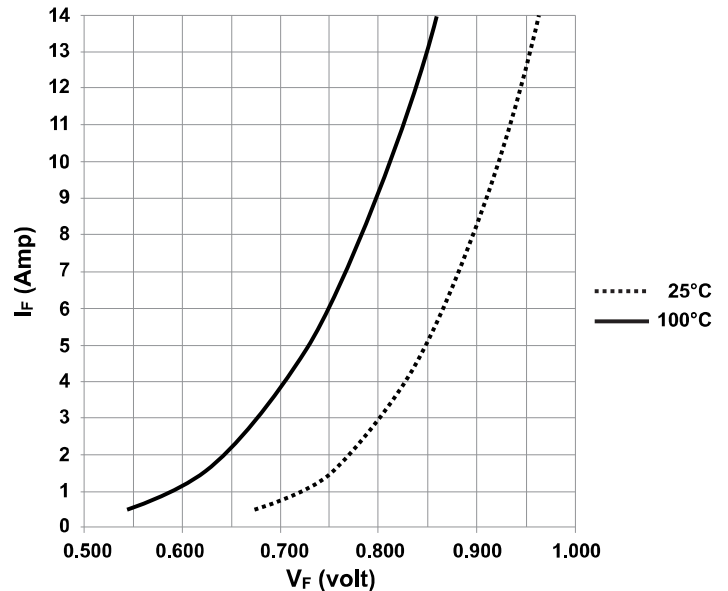

NOTE: All specifications are subject to change without notification.
 SCD's for these devices should be reviewed by SSDI prior to release.

DATA SHEET #: RC0119N

DOC



Solid State Devices, Inc.

14701 Firestone Blvd * La Mirada, Ca 90638
 Phone: (562) 404-4474 * Fax: (562) 404-1773
 ssdi@ssdi-power.com * www.ssdi-power.com

**1N7066 thru 1N7068
 Series**

Package Outlines:

AXIAL LEADED ()			SURFACE MOUNT SQUARE TAB (US / SMS)		
DIMENSIONS (inches)			DIMENSIONS (inches)		
DIM.	Minimum	Maximum	DIM.	Minimum	Maximum
A	.135	.165	A	.172	.180
B	.135	.155	B	.180	.220
C	.036	.042	C	.020	.028
D	.900	1.30	D	.002	---

FLAT LEADS (FL)		
DIMENSIONS (inches)		
DIM.	Minimum	Maximum
ØA	.135	.165
B	.065	.085
C	.015	.021
D	.084	.104
E	.620	.660
F	REF .090	
G	.295	.335
H	REF R.03	
I	REF 120°	

FEATURES FOR FLAT LEADS PACKAGE

- Solid silver leads
- Provide stress relief (customizable to customer specifications)
- Ideal for welding to BUS bar
- Typical application: solar array bypass / blocking diodes for photovoltaic (PV) panels